



# ACRYLIC PLASTIC FLOW METER

## FAC200 SERIES

### Technical Data

**Service:** water or liquid  
**Wetted parts material:** Body-Acrylic, Plastic (POLYPROPYLENE), O-ring- EPDM  
**Float Guide:** 304 stainless steel  
**Connection material:** POLYPROPYLENE  
**Temperature & pressure limits:** 120 psig (8.4 bar) @100°F (38°C)  
**Temperature limited:** 0-45°C  
**Accuracy:** ±3% full scale  
**Mounting:** vertical position  
**Weight:** 0.31 kg

### Dimensions

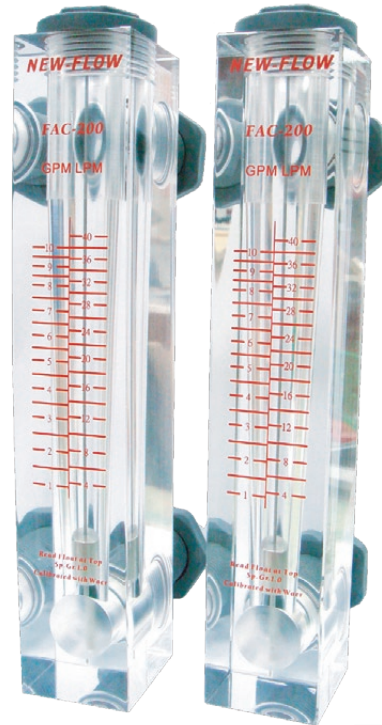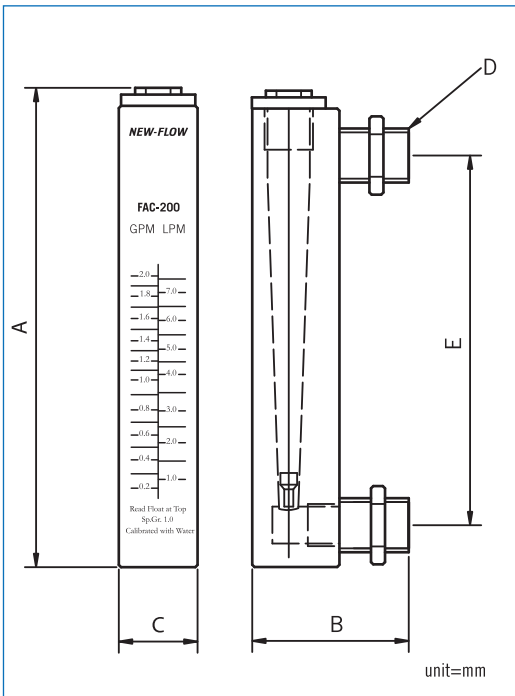

### Range Table / Ordering information

MODEL	Range Dual Scale		Connection size
	GPM	LPM	
FAC-201	0.2 ~2.0	1~7.5	3/8"NPT(male)
FAC-202	0.5~5.0	2~20	1/2"NPT(male)
FAC-203	1.0~10.0	4~40	3/4"NPT(male)

#### Flow Unit

GPM, Gallon (us) per Minute  
 LPM, Litter per Minute

### Dimensional Data

Model	A (inch/mm)	B (inch/mm)	C (inch/mm)	D	E (inch/mm)
FAC-201	8.4/213.2	2.75/70	1.38/35	3/8"NPT	6.5/165
FAC-202	8.4/213.2	2.75/70	1.38/35	1/2"NPT	6.5/165
FAC-203	9.0/229.2	3.75/95.2	1.58/40	3/4"NPT	6.5/165